

TEADIT 24 SH

Description:

TEADIT 24 SH is a large gasket sheet produced from 100 % pure, multi-directionally expanded PTFE. The whole production process is subject to strictest quality control, registered under DIN EN ISO 9001 & 14001.

Advantages:

- Universally employable gasket sheet for all applications. It is suitable for all types of flanges, nearly all media, a wide temperature range and for applications with the toughest demands on purity. It is inherently clean and non-toxic.
- Gaskets of multi-directionally expanded PTFE have exceptional mechanical strength which allows operation with minimal creep at elevated temperatures.
- The excellent malleability of **TEADIT 24 SH** makes repairing of small damages and/or irregularities of the sealing area (flange surface) unnecessary.
- Gaskets cut from **TEADIT 24 SH** are dimensionally stable, i.e. they do not get wider when compressed. This allows narrow flange faces to be sealed safely.
- **TEADIT 24 SH** is quick and simple to install. The used gasket can be removed easily and without residue.

Properties:



- Color: white
- Size: 1500 mm x 1500 mm
- Thickness: from 0.5 mm up to 9.0 mm
- Temperature range: -268 °C up to +260 °C (short +315 °C)
- Chemical resistance: chemically inert against all substances (pH 0-14), including the most aggressive acids and lyes. The only exceptions are molten alkali metals and elemental fluorine at high temperature and pressure.
- Operating pressure: from vacuum to 200 bar
- Aging: **TEADIT 24 SH** is not subject to aging or weathering. It can be stored indefinitely.
- **TEADIT 24 SH** complies to FDA regulations for food, it is physiologically harmless.
- Suitable for oxygen applications.
- Typically **24 SH** sheets come printed in red color.
- For applications in the pharmaceutical and / or food industry the sheets can be delivered with embossed printing without color.

Approvals:

- TA-Luft
- Blow-Out
- FDA • EU 1935/2004 • EU 10/2011
- USP Plastic Class VI
- DVGW • WRAS • ABS

Tests:

- BAM

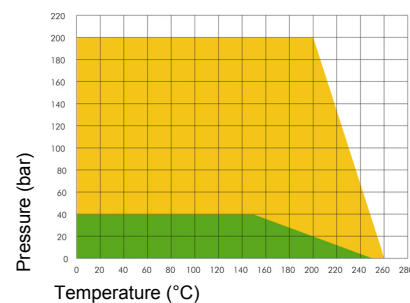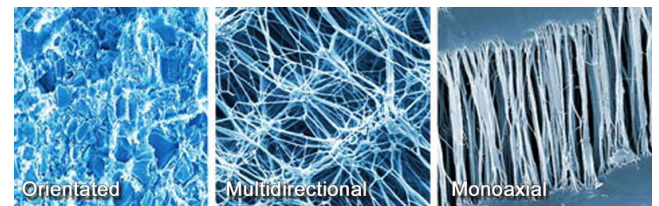

P x T diagram:

The P x T diagram above indicates the service limits considering the simultaneous influence of pressure and temperature. The green area represents the normal service limits, while the orange colored area shows the maximum application limits.

Since all properties, specifications and application parameters shown throughout this catalogue are approximate and may be mutually influenced, your specific application should not be undertaken without independent study and evaluation for suitability. All technical data and advice given is based on experiences TEADIT® has made so far. Failure to select proper sealing products can result in damage and/or personal injury. Properties, specifications and application parameters are subject to change without notice. TEADIT® does not undertake any liability of any kind whatsoever. Please note: the color of the actual product might vary from the above image on this data-sheet.

TEADIT INT. - Rosenheimer Str. 10, 6330 Kufstein, AUSTRIA, Tel.: +43-5372-64020-0, Fax: +43-5372-64020-20, austria@teadit.eu, www.teadit.eu
 TEADIT Deutschland - Schanzenstr. 35, 51063 Cologne, GERMANY, Tel.: +49-221-922 342-0, Fax: +49-221-922 342-22, germany@teadit.eu

TEADIT 24 SH		
Technical Parameters	Unit	TEADIT 24 SH
Thickness	[mm]	0,50 - 9,00
Sheet dimensions	[mm]	1500 x 1500
Purity ePTFE	[%]	100
Color material		plain white
Color printing		red (or embossed)
Operating Temperature Range	[°C]	- 268 to + 260
Operating pressure	[bar]	Vacuum to 200
Gasket factors acc. DIN28090-2		
Compression (room temperature) εKSW	[%]	35 - 40
Creep relaxation (room temperature) εKRW	[%]	>3
Compression (elevated temperature) εVSW	[%]	<15
Gasket factors acc. ASTM		
Compressibility ASTM F 36M (34,5 MPa)	[%]	>45
Recovery ASTM F 36M (34,5 MPa)	[%]	>10
Creep ASTM F 38 (100 °C)	[%]	≤22
Other Properties		
Residual stress DIN 52913	MPa	>15
Leakage rate TA Luft / VDI 2440	mbar*l/(s*m)	2,6*10-7
Leakage rate DIN 3535-6 (40bar, N2)	ml/min	<0,01
Tensile strength ASTM F 152	MPa	>20
Gasket factor "m" ASTM		2 (for 3,0 mm)
Minimum gasket stress "y Stress" ASTM	psi	2800 (for 3,0 mm)

Since all properties, specifications and application parameters shown throughout this catalogue are approximate and may be mutually influenced, your specific application should not be undertaken without independent study and evaluation for suitability. All technical data and advice given is based on experiences TEADIT® has made so far. Failure to select proper sealing products can result in damage and/or personal injury. Properties, specifications and application parameters are subject to change without notice. TEADIT® does not undertake any liability of any kind whatsoever. Please note: the color of the actual product might vary from the above image on this data-sheet.

TEADIT INT. - Rosenheimer Str. 10, 6330 Kufstein, AUSTRIA, Tel.: +43-5372-64020-0, Fax: +43-5372-64020-20, austria@teadit.eu, www.teadit.eu
 TEADIT Deutschland - Schanzenstr. 35, 51063 Cologne, GERMANY, Tel.: +49-221-922 342-0, Fax: +49-221-922 342-22, germany@teadit.eu